
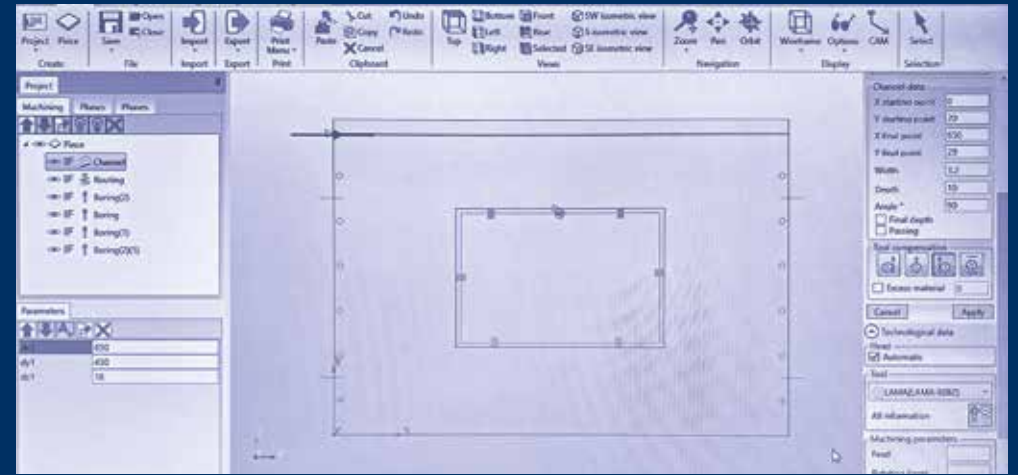


startech *range*

drilling machines for the advanced joinery

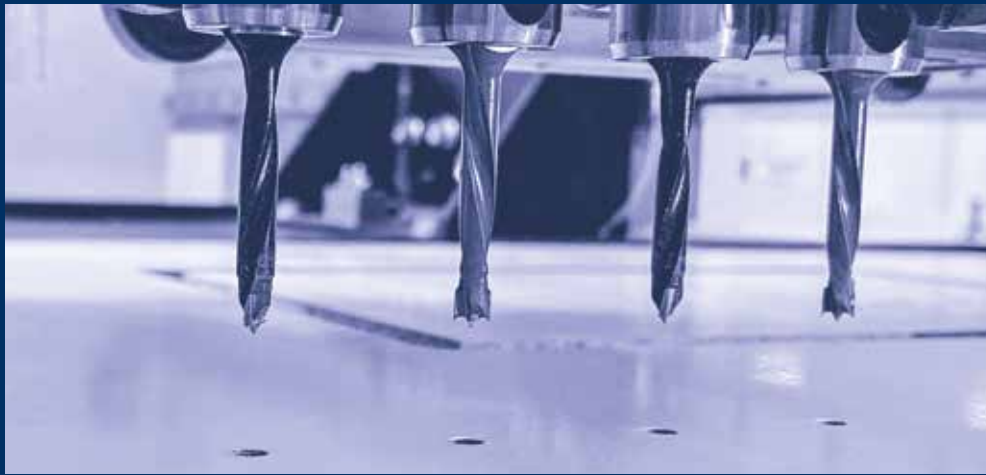

All “Made in SCM Italy”

From casting iron to finished product.

Come see our production plants and touch the quality of SCM machines;
you will be our guest.



Drilling machines for the advanced joinery.

SCM's objective is to guarantee customers high quality technologies which meet their requirements in such a way as to make SCM the partner for any needs.

startech *range*

For all drilling requirement.

drilling machines	automatic
	manual

startech cn plus
page 4



startech cn v
page 5




startech 27
page 10



startech 21
page 11



automatic
drilling machines
startech cn plus
startech cn v

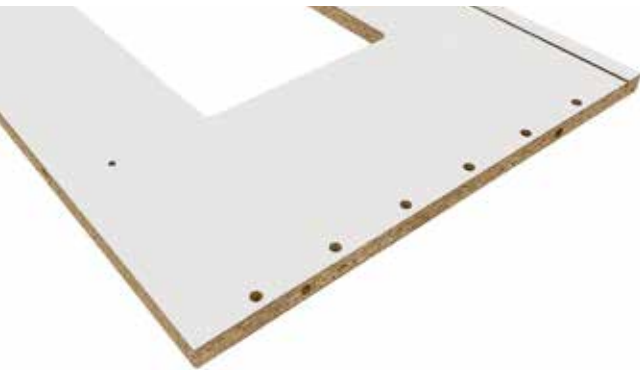

		startech cn plus	startech cn v
Maximum panel dimensions X-Y-Z	mm	3050 x 900 x 60	3000 x 900 x 50
Minimum panel dimensions X-Y-Z	mm	200 x 80 x 10	300 x 90 x 10
Maximum X-Y-Z axes speed	m/min	40/40/10	20
Vertical spindles	n.	8	7 (4X-4Y one of them is shared)
Horizontal spindles	n.	6	4
Spindles rotation speed	rpm	4200	4460

Find the complete technical specification at page 9



Drilling from the Top
perfect finish



Elements Production
versatility




Maestro Software
easy and intuitive

The numerical control universal drilling machines for woodworking shops and craftsmen.

automatic drilling machines operating groups


effective Drilling head

With 14 independent spindles (8 vertical spindles and 6 horizontal spindles), integrated blade in X direction and possibility to add an **optional routing group (startech cn plus)** with 5,5 kW motor power!

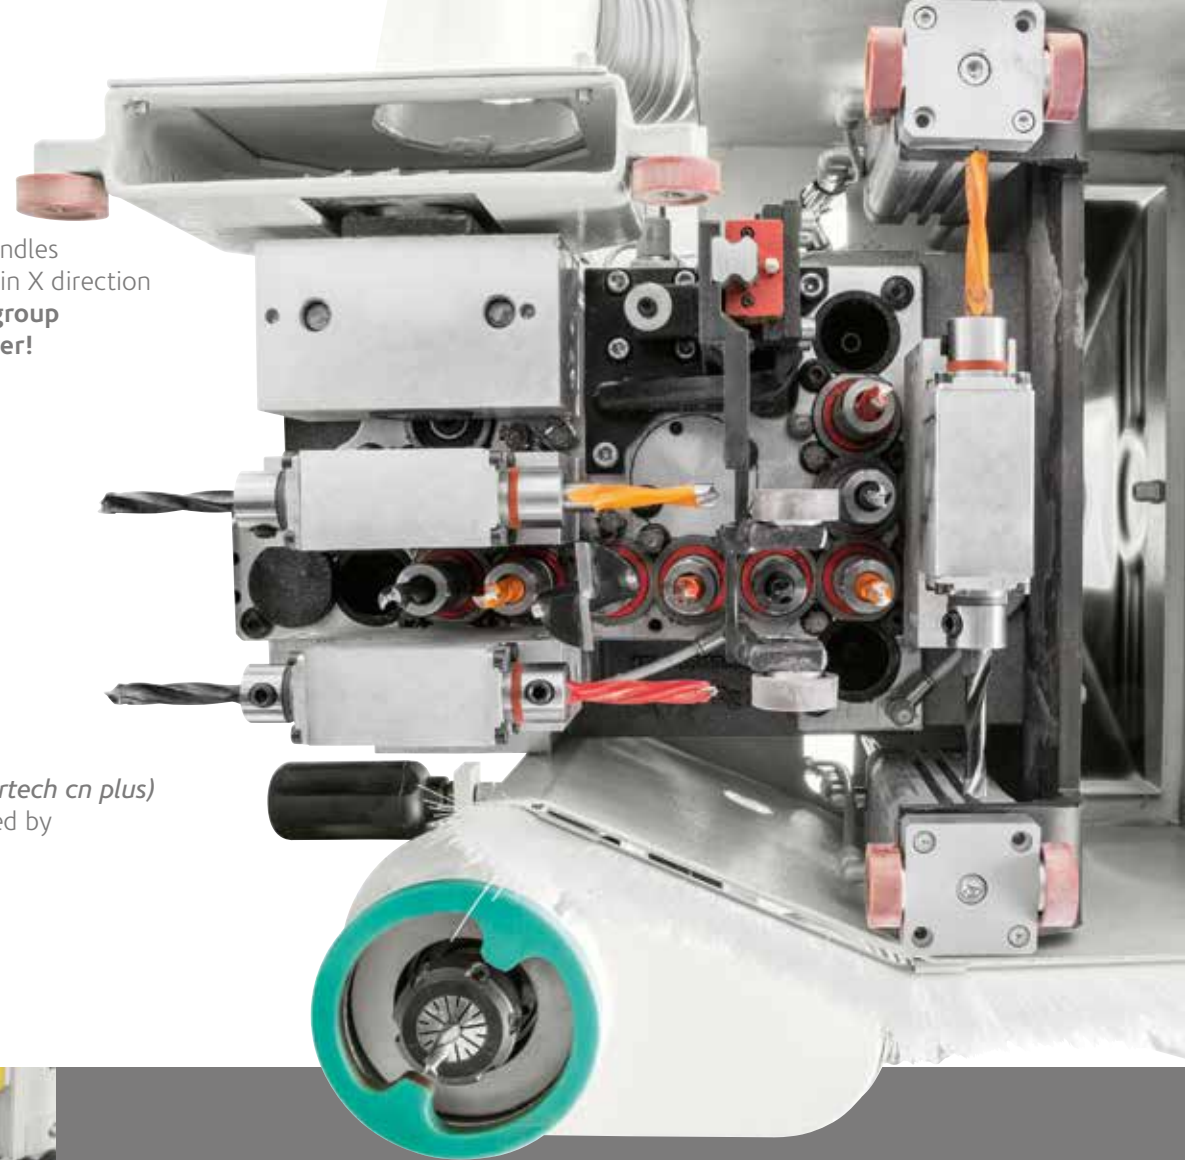

easy panels movement

Automatic side-alignment device (startech cn plus) with pneumatic positioning and managed by the drilling-routing program.

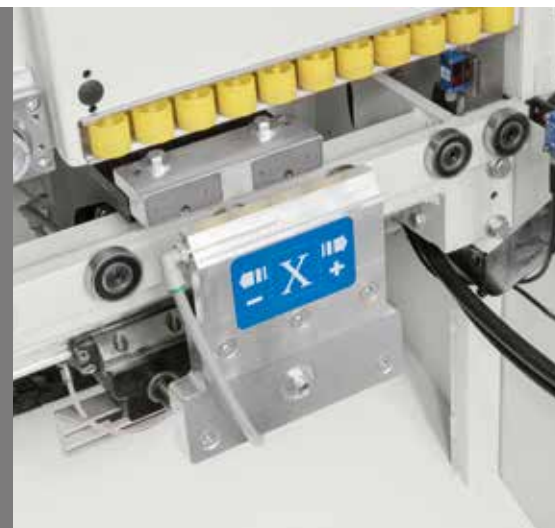


guaranteed reliability

Mobile clamp with floating opening
Optimal piece stability and high working quality.


Drilling from the Top

The drilling head positioned above the panel allows an accurate machining which can be verified in the cabinet assembly phase: the system uses the outside of the panel (in sight) as a reference and thus **any differences in thickness are always on the inside of the cabinet (non in sight)**. Furthermore, the positioning of the drilling head upper the working chips and dust grants a better cleaning and a reduced maintenance.

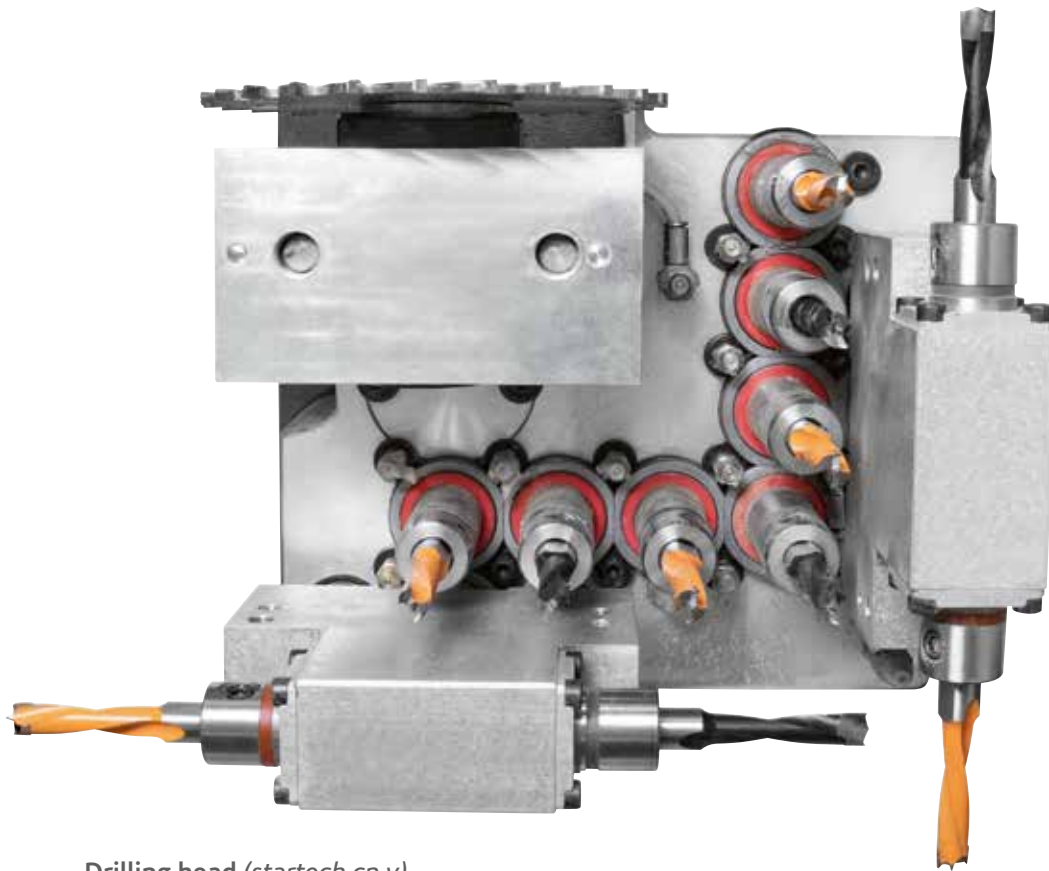


Drilling head (startech cn v)
With 11 independent spindles and integrated blade in X direction.

easy and intuitive
PC with integrated software
(startech cn plus)
The SCM "Maestro cnc" software allows
to create projects and geometrical
drawings to be automatically
converted in drilling-routing programs
for the machine.

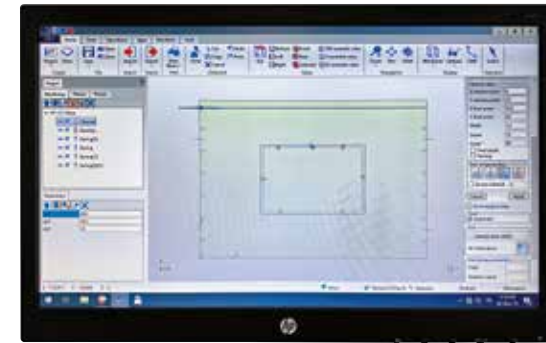

Numerical control
(startech cn v)
NC 10" colour touch-screen display
and self-diagnosis and signalling
system of errors or damages.
Head tooling and machining cycle
programming without using any
mouse or keyboard and with
automatic optimization.

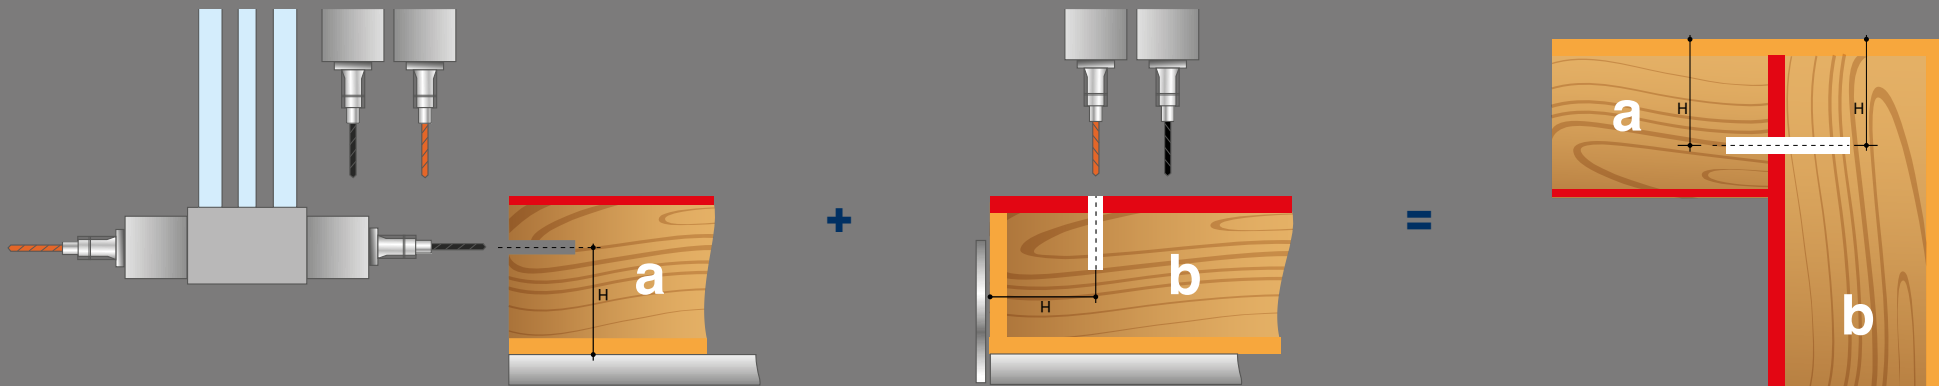

automatic drilling machines main optional devices



F23 drilling head


High performance and rapid set-up thanks to the drilling unit with 23 independent spindles (13 vertical spindles and 10 horizontal spindles, 6X + 4Y) with integrated blade in X direction.

The possibility to equip the head with several bits of different diameters, guarantees maximum flexibility of use and reduced maintenance.

(startech cn plus)

Maestro cnc

Expand your creativity



Possibility to import and export the drilling programs, even when created with a CAD/CAM software in the office, through USB key (post processor not included).
(standard on startech cn plus)

Removable side supports
to adjust and support long work-pieces.
(startech cn plus)




Automatic centralized lubrication
managed by the control.

Barcode reader
With a simple "click" of the barcode reader, it is very rapid and simple to recall drilling program, correctly stored in the machine control.




automatic drilling machines technical data

startech cn plus

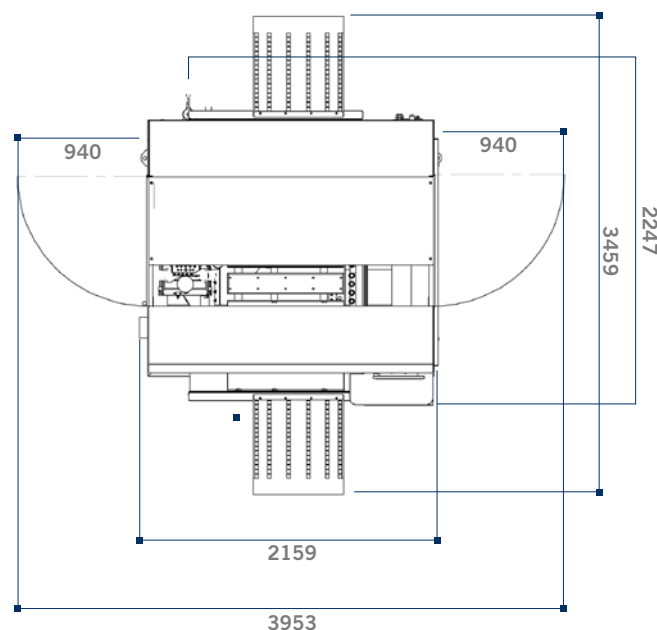

startech cn v

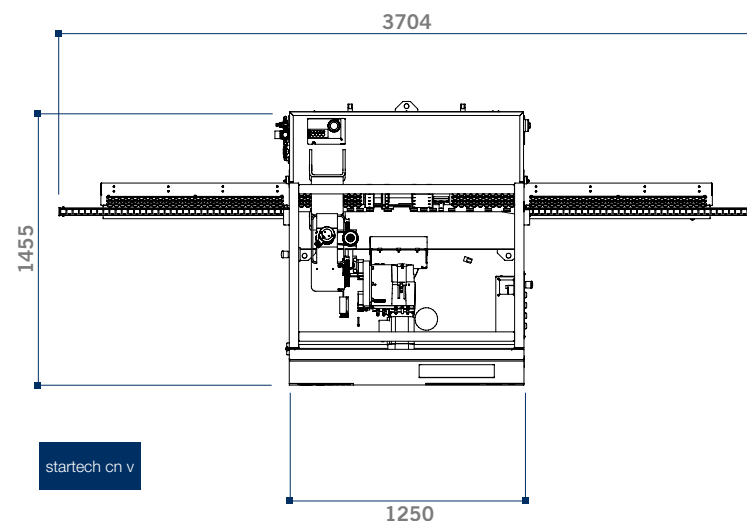

TECHNICAL DATA

		startech cn plus	startech cn v
Min. ÷ max. panel length	mm	200 ÷ 3050	300 ÷ 3000
Min. ÷ max. panel width	mm	80 ÷ 900	90 ÷ 900
Min. ÷ max. panel thickness	mm	10 ÷ 60	10 ÷ 50
Max. X-axis speed	m/min	40	20
Max. Y-axis speed	m/min	40	20
drilling head			
Vertical spindles	n.	8 (F14) - 13 (F23)	7 (F11) - 8 (F14)
Horizontal spindles	n.	6 (F14) - 10 (F23)	4 (F11) - 6 (F14)
Motor power	kW (hp)	2,2 (3)	2,2 (3)
Spindles rotation speed	rpm	4200	4460
Fixed integrated disc cutter	direction	X	X
Max. diameter disc cutter	mm	125	125
Disc cutter rotation speed	rpm	5500	5700
electrospindle			
Motor power	kW (hp)	5,5 (6)	-
Min. ÷ max. speed	rpm	1000 ÷ 18000	-
Tool changer		manual	-
Max. tool diameter	mm	20	-
other technical features			
Compressed air consumption	Nl/min	50	90
Extraction air consumption	m ³ /h	1900+540+1200 (+540 for R version)	820
Exhaust air speed	m/sec	30	20
Installed motor power (minimum)	KVA	15,2 (20,7 for R version)	4,5
Exhaust hood diameter	mm	150+120+80 (+80 for R version)	120

manual
drilling
machines
startech 27
startech 21



		startech 27	startech 21
Spindles	n.	27	21
Worktable dimensions	mm	1096 x 407	905 x 372
Max. panel width under the "beam" structure	mm	1025	833
Max. tool diameter	mm	40	40
Min. ÷ max. panel thickness	mm	10 ÷ 85	10 ÷ 85
Spindles rotation speed	rpm	2800	2800

Find the complete technical specification at page 15



Drilling Head
perfect finish



Cleaning System
highly effective



Hinges Groups
high-tech accessories

Excellence in manual drilling.

manual drilling machines operating groups

perfect drilling Drilling head

It is made from single-piece aluminium casting, to guarantee absence of vibrations. The drilling group runs on two rectified cylindrical guides which guarantee stability and accuracy. The dust extraction system is incredibly efficient.



The machine is equipped with a mechanical revolver with 5 different drilling depth adjustments.



rapid set-up
Spindles with
quick-release fittings
Bits replaced quickly and easily.



ergonomic
Drilling head movement
All controls are ergonomically positioned on the front of the machine, including the switch that pneumatically tilt the drilling head, allowing an immediate changeover between operations.

90°


45°

0°

fast and precise positioning

Mechanical gauge


It guarantees fast and precise positioning of the lateral fences.

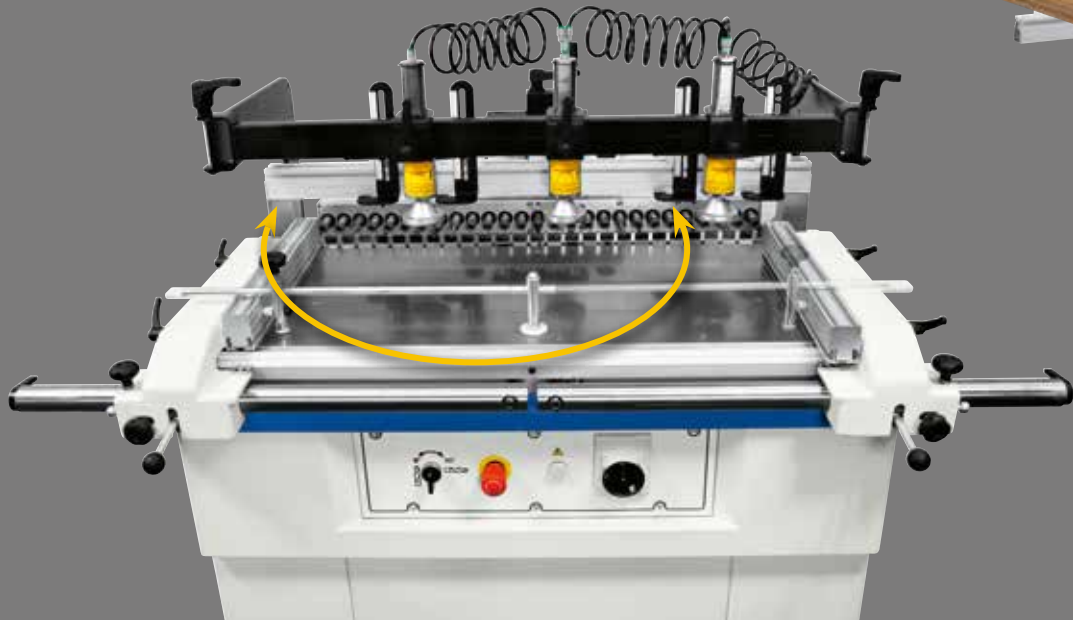

versatile, with many useful options, intelligent

3000 mm guide

For a perfect drilling even of large panels the machines are equipped with a 3000 mm length lateral guide, millimetered and with reversible stops, quickly installable/removed.

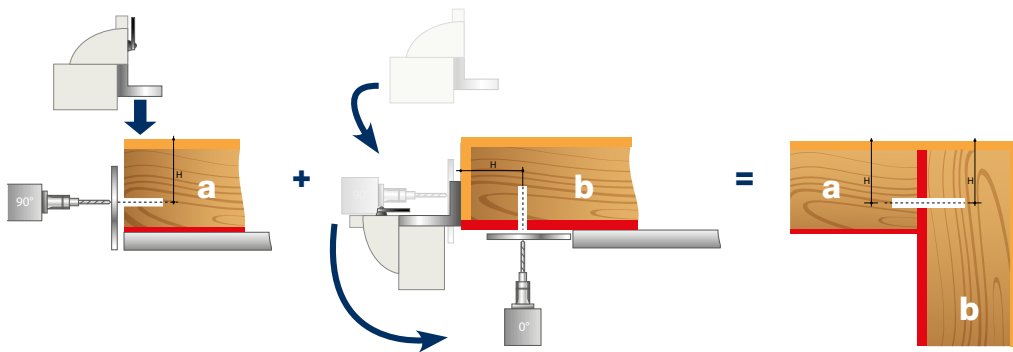

effective

"Invisible" imperfections

The drilling concept of Startech machines allows to obtain an important advantage which can be verified in the cabinet assembly phase: the system uses the outside of the panel (in sight) as a reference and thus **any differences in thickness are always on the inside of the cabinet (non in sight).**

Cast iron guides

with the nonius decimal scale and micrometric guides travel.




manual drilling machines

main optional
devices



Guide for horizontal drilling at 45°
Simple and effective.

Device for working narrow work-pieces
Easy-to-use.

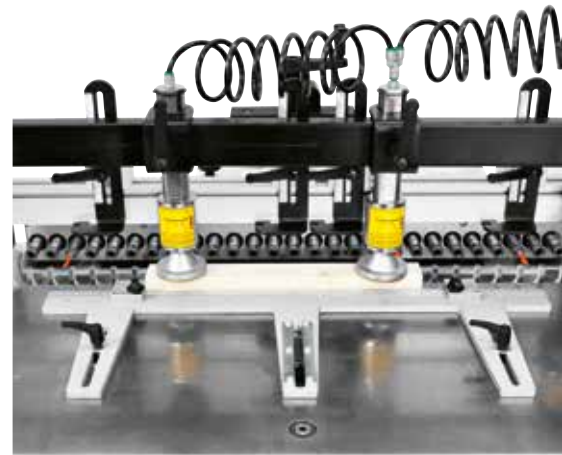

Groups for hinges
For increased versatility, the quick change chucks can be fitted with various types of bits for different operations, like drilling hinges locations.




MAIN OPTIONAL DEVICES

	startech 27	startech 21
Pneumatic movement of the drilling head	S	O
Servo-assisted drilling unit down stroke speed adjustment	O	O
Guide for horizontal drilling at 45°	O	O
Device for working narrow work-pieces	O	-
Groups for hinges	O	O

manual drilling machines technical data

S Standard
O Option

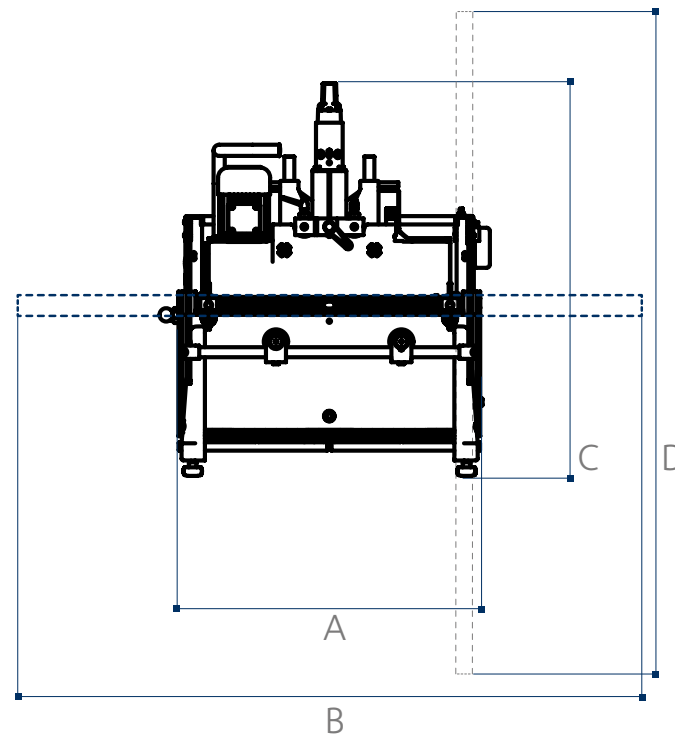

OVERALL DIMENSIONS		startech 27	startech 21
A	mm	1500	1000
B	mm	3000	3000
C	mm	1260	1150
D	mm	3000	3000

TECHNICAL DATA		startech 27	startech 21
Worktable dimensions	mm	1096 x 407	905 x 372
Worktable height	mm	900	900
Spindles	n.	27	21
Spindles rotation speed (at 50 Hz)	rpm	2800	2800
Distance between spindles	mm	32	32
Maximum drilling inter-axis	mm	832	640
Maximum drilling head stroke	mm	70	70
Maximum horizontal drilling height	mm	60	60
Max. panel width under the "beam" structure	mm	1025	833
Min. ÷ max. panel thickness	mm	10 ÷ 85	10 ÷ 85
Max. tool diameter	mm	40	40
other technical features			
Three-phase motors 1,8 kW (2,5 hp) 50 Hz - 2,2 kW (3 hp) 60 Hz		S	S
Pneumatic system operating pressure	bar	6	6
Compressed air consumption	NI/cycle	3,5	3,5
Exhaust hood diameter:			
- at the base	mm	120	80
- on the drilling head	mm	2 x 80	2 x 80



SERVICE AND MAINTENANCE



TRAINING SERVICE



SPARE PARTS



DIGITAL SERVICES

 **scm** | service

**WE'LL GO THE
EXTRA MILE
FOR YOU**

CONTACT

SCM SERVICE

via Emilia 77 - 47921 Rimini - Italy
tel. +39 0541 700100
scmservice@scmgroup.com
www.scmwood.com

SCM SPAREPARTS

Via Casale, 450 - 47826 - Villa Verucchio (RN) - Italy
tel. +39 0541 674111
spareparts@scmgroup.com
www.scmwood.com



My Scm

SCM OFFERS A FULL RANGE OF **HIGHLY SPECIALISED SERVICES** WITH A QUALITY AND RELIABILITY THAT STEM FROM 70 YEARS OF EXPERIENCE IN THE INDUSTRY.

From installation and production start-up to services and maintenance.

From training to the supply of specific original spare parts: **we provide solutions designed around you!**



SERVICE AND MAINTENANCE

- Remote support
- Scheduled maintenance contracts
- Warranty extension



TRAINING SERVICE

- Courses for machine operators
- Software and programming courses
- Training in production start-up



SPARE PARTS

- Recommended spare parts list
- E-shop
- Interactive spare-parts catalogues
- Repairs on electronic parts, glue tanks and electro-spindles



DIGITAL SERVICES

- Maestro Connect - IoT platform to be constantly connected with your machines
- Smartech - assistance with augmented reality
- My Scm portal - opening of service ticket and single point of access to the apps and Services tools



THE STRONGEST WOOD TECHNOLOGIES ARE IN OUR DNA

SCM. A HERITAGE OF SKILLS IN A UNIQUE BRAND

70 years of success gives SCM the centre stage in woodworking technology. This heritage results from bringing together the best know-how in machining and systems for wood-based manufacturing. SCM is present all over the world, brought to you by the widest distribution network in the industry.

70 years history

3 main production sites in Italy

300.000 square metres of production space

20.000 machines manufactured per year

90% export

20 foreign branches

400 agents and dealers

500 support technicians

500 registered patents

In **SCM's DNA** also strength and solidity of a great Group. The SCM Group is a world leader, manufacturing industrial equipment and components for machining the widest range of materials.

SCM GROUP, A HIGHLY SKILLED TEAM EXPERT IN INDUSTRIAL MACHINES AND COMPONENTS

INDUSTRIAL MACHINERY

Stand-alone machines, integrated systems and services dedicated to processing a wide range of materials.



WOODWORKING TECHNOLOGIES



TECHNOLOGIES FOR PROCESSING
COMPOSITE MATERIALS, ALUMINIUM,
PLASTIC, GLASS, STONE, METAL

INDUSTRIAL COMPONENTS

Technological components for the Group's machines and systems, for those of third-parties and the machinery industry.



SPINDLES AND
TECHNOLOGICAL
COMPONENTS



ELECTRIC PANELS



METALWORK



CAST IRON



is more



SCM GROUP SPA

via Casale 450 - 47826 Villa Verucchio, Rimini - Italy
tel. +39 0541 674111 - fax +39 0541 674274
scm@scmgroup.com
www.scmwood.com



00L0590733A